

Test Report SL52035273350201TX Date:July 29,2020 Page 1 of 10

HUNAN EEXI TECHNOLOGY&SERVICE CO.,LTD NO.6, NORTH OF PINGTOU ROAD, LIUYANG HI-TECH INDUSTRIAL DEVELOPMENT ZONE, HUNAN, CHINA

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description : (A)Particle filtering half mask

Claimed : FFP2 Style No. : YX153

Composition : (A)non-woven fabric, melt-blown fabric, bridge of nose, ear belt, breathing valve

Sample Color : (A)WHITE

Manufacturer : HUNAN EEXI TECHNOLOGY&SERVICE CO.,LTD

Test Performed : Selected test(s) as requested by applicant

Sample Receiving Date : Jul 16, 2020

Testing Period : Jul 16, 2020 - Jul 29, 2020

Test Result(s) : Unless otherwise stated the results shown in this test report refer only to the


sample(s) tested, for further details, please refer to the following page(s).

Conclusion:

Sample No.	Recommendation Level	
(A)	FFP2 NR	

Signed for and on behalf of

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd Testing Center





In each otherwise, agreed in writing, this document is leased by the Company authent to the Centernt Conditions of Service in many collect, available on request or accessorable of the Many ways, content times and Condition approach of control of the Company and Condition approach of the Company of the Com



SL52035273350201TX

Date:July 29,2020

Page 2 of 10

Test Result

<u>Personal Protective Equipment - Respiratory Protective Devices- Filtering Half Masks to Protect against Particles- Requirements, Testing, Marking</u>

EN 149:2001+A1:2009

Clause 7.4 Packaging

(EN 149:2001+A1:2009 Clause 8.2)

Test Requirement	Results	Comment
Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	Comply	Pass

Clause 7.5 Material

(EN 149:2001+A1:2009, Clause 8.2 & 8.3.1 & 8.3.2)

Test Requirement	Results	Comment
Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	Comply	
After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	Comply	Pass
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.	Comply	
Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	Comply	

Clause 7.6 Cleaning and Disinfecting

(EN 149:2001+A1:2009, Clause 8.4 & 8.5 & 8.11)

Test Requirement	Results	Comment
If the particle filtering half mask is designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer. With reference to 7.9.2, after cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class.	Not applicable (Not designed to be re-usable)	N.A.

Clause 7.7 Practical Performance

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The particle filtering half mask shall undergo practical performance tests under realistic conditions. These general tests serve the purpose of checking the equipment for imperfections that cannot be determined by the tests described elsewhere in this standard.		Pass



liness otherwise agreed it writing this populate is issued by the Company subsol to its General Conditions of Service printed credited, available or request or accessible at http://www.ags.com/en/herm-en/Londitions.ags.cnd, for electronic to metabourners, audictor is former and Conditions for Electronic Documents at http://www.ags.com/en/herm-en/Londitions/formers_Documents.ags.ditartion is drawn to the initiation of libility, indominification and jurisdiction become function to the construction of the intervention only ender of this by the company's distribution of individual of the intervention only end within the limits of Client's individual to the Intervention only and within the limits of Client's individual of the Company's side responsibility is to the Client and this document, case not economic carries to a literation. For accordant damage, and the individual of the Company's under the transaction documents. The command carried to represent the company of th

576年 njh (89)74 n fie 134 i Dobidžie g ei (1862-200233 中国・上海・特江区立山 東部19号 7号数 - 新編 - 200233 1935-21| 61400666 1935-21| 61400666

1 (85-21) 84958783 1 (85-21) 84958783 www.sgsgroup.com.on wilege.china@age.gom



SL52035273350201TX

Date:July 29,2020

Page 3 of 10

Clause 7.8 Finish of Parts

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs.	No sharp edges or burrs	Pass

Clause 7.9.1 Total Inward Leakage

(EN 149:2001+A1:2009, Clause 8.5)

Test Requirement	Results	Comment
The total inward leakage consists of three components: face seal leakage, exhalation value leakage(if exhalation value fitted) and filter penetration. For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1, 11% for FFP2, 5% for FFP3 and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than: 22% for FFP1, 8% for FFP2, 2% for FFP3	Detail refer to Appendix 1	Pass

Appendix 1: Summarization of Test Data

Inward Leakage Test Data

	mmara Loanago 100t Bata							
Subject	Sample	Condition	Walk(%)	Head	Head	Talk(%)	Walk(%)	Mean(%)
	No.			Side/side(%)	up/down(%)			
Zhou	1	A.R.	5.76	6.43	5.61	6.55	5.82	6.03
Luo	2	A.R.	6.89	7.59	7.49	7.00	6.19	7.03
Lu	3	A.R.	4.75	6.13	6.12	6.79	6.85	6.13
Wang	4	A.R.	5.21	4.32	6.64	4.21	4.87	5.05
Bao	5	A.R.	6.26	6.64	6.73	7.81	7.66	7.02
Ding	6	T.C.	4.85	5.74	5.09	5.40	5.51	5.32
Li	7	T.C.	8.24	7.34	6.82	6.03	8.70	7.43
Chen	8	T.C.	6.49	4.22	6.70	5.82	4.82	5.61
Song	9	T.C.	7.33	6.75	6.33	7.76	5.64	6.76
Ye	10	T.C.	8.07	8.80	7.31	6.62	7.53	7.67

Facial Dimension(mm)

Subject	Face length	Face Width	Face Depth	Mouth Width
Chen	125	150	120	58
Lu	115	132	107	48
Zhou	115	135	106	52
Li	125	130	107	46
Luo	125	136	100	43
Zheng	128	140	112	55
Wang	120	147	103	48
Song	120	140	100	50



linear otherwise agreed in writing this popument is tessed by the Company with act in its General Conditions of General probabilities an explaint or accessible at http://www.ags.com/ann/ann/Conditions/ags.com/, for also probabilities and Conditions for Electronic Documents at http://www.ags.com/ann/ann-and-Conditions/forms-2-Documents-2-Additional is drawn to the initiation of liability. Indominification and principles conference to the control of the transfer of the formation of the large of the common is advised that information contained hereon reliefs the Company's findings at the time of its intervention only and within the linits of Clerita and this document loss and within the linits of Large of the Company and respectively in the Section of the control control of the section of the control of the

576年 ((Aut 2007年) 1764 (1764 (1764 (1765 200233) 中国・上海・特征区立山東部9号7号線 解釈 200233 1,38-21,61400666 1,38-21,61400666

1 (85-21) 84958783 1 (85-21) 84958783 www.sgsgroup.com.on # ege.china@age.com



Test Rep	ort SL52	SL52035273350201TX		Page 4 of 10
Bao	130	134	104	50
Ding	134	150	110	52
Liu	120	135	117	50
Ye	126	137	105	52

Clause 7.9.2 Penetration of Filter Material

(EN 149:2001+A1:2009, Clause 8.11 & EN 13274-7:2019)

	Test Requirement		Results	Comment	
	of the filter of the particle filte the following table.				
Classifica	Maximum penetration	on of test aerosol			
tion	Sodium chloride test 95 l/min	Paraffin oil test 95 l/min		Detail refer to	
	%	%		Appendix 2	Pass
	max.	max.			
FFP1	20	20			
FFP2	6	6			
FFP3	1	1			

Appendix 2: Summarization of Test Data

Penetration of filter material

Aerosol	Condition	Sample No.	Penetration (%)
		1	0.132
	As received	2	0.110
		3	0.149
		4	0.122
Sodium chloride test	Simulated wearing treatment	5	0.141
	-	6	0.137
	Mechanical strength +Temperature conditioned	7	0.231
		8	0.272
	Conditioned	9	0.245
		10	0.235
	As received	11	0.347
		12	0.296
		13	0.302
Paraffin oil test	Simulated wearing treatment	14	0.346
		15	0.374
	Machaniaal atuanath . Tananauatuus	16	0.334
	Mechanical strength +Temperature conditioned	17	0.574
	Conditioned	18	0.472
	Flow conditioning : Single fil	ter: 95.0 L/min	



linear otherwise agreed it writing this potential is issued by the Company with act this Genetal Conditions of Service printed overlast, available on request or accessible at http://www.agr.com/article-arti

5³5 春 東海 (89) Web office 19 a 470 本 470 年 東 e 17 fice 2002 33 中国・上海・特江区立山 海890号 7号線 - 約48 - 2002 33 1) (35-21) 61402668 1) (35-21) 61402668

1 (85-21) 64958763 1 (85-21) 64958763 www.sgsgroup.com.cn er ege.china@ags.com



Test Report SL52035273350201TX Clause 7.10 Compatibility with Skin

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Date:July 29,2020

Page 5 of 10

Test Requirement	Results	Comment
Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.	No irritation or any other adverse effect to health	Pass

Clause 7.11 Flammability

(EN 149:2001+A1:2009, Clause 8.6)

Test Requirement	Results	Comment
The material used shall not present a danger for the wearer and shall not be of highly flammable nature	Detail refer to	Door
When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.	Appendix 3	Pass

Appendix 3: Summarization of Test Data

Flammability

1 10	arririabilit <u>y</u>		
	Condition	Sample No.	Result
		1	NIL
	As received	2	NIL
		3	NIL
	Temperature conditioned	4	NIL

Clause 7.12 Carbon Dioxide Content of The Inhalation Air

(EN 149:2001+A1:2009, Clause 8.7)

Test Requirement	Results	Comment
The carbon dioxide content of the inhalation air (dead space) shall not	Detail refer to	Pass
exceed an average of 1,0 % (by volume)	Appendix 4	F a 5 5

Appendix 4: Summarization of Test Data

Carbon Dioxide Content of The Inhalation Air

Condition	Sample No.	Resul	Result(%)				
	1	0.4810					
As received	2	0.4831	Mean value:0.48				
	3	0.4824					



Unless otherwise agreed to writing this procurem to issued by the Company with sold in its General Conditions of Service printed overheat, available on request or accessable at high/www.ags.comem terms-end-Conditions.ags.and, for electronic terms documents at high/www.ags.com/entrems-and-Conditions/forms-a Documents at high/www.ags.com/entrems-and-Conditions/forms-a Documents as Allendors to dissued offices the Conditions/forms-a Documents as a finite documents to the initiation of libility. Indomnification and appropriate the time of the time of the consent is educated that information contained hereon reliefs the Company is finding to the time of its intervention only and within the limits of Clientar influedors. If serv. The Company a sale responsibility is to the Clientaria of this document cost as contained contained to a sale and obligations under the thereselves the document and extremely carries to a flastication of the document and the individual contained contained to the company and the individual contained to the contained to the contained contained to the contained to the contained contained to the contained

576年 ((Aut 2007年) 1764 (1764 (1764 (1765 200233) 中国・上海・特征区立山東部9号7号線 解釈 200233 1)35-21) 61400668 1)35-21) 61400668

1 (85-21) 84958763 1 (85-21) 84958763 www.sqsqroup.com.cn er ege.china@age.com



Test Report SL52035273350201TX Clause 7.13 Head Harness

Date:July 29,2020

Page 6 of 10

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Test Requirement	Results	Comment
The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.	Comply	
The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.	Comply	Pass

Clause 7.14 Field of Vision

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The field of vision is acceptable if determined so in practical performance tests.	Comply	Pass

Clause 7.15 Exhalation Valve(s)

(EN 149:2001+A1:2009, Clause 8.2 & 8.9.1 & 8.3.4 & 8.8)

Test Requirement	Results	Comment
(a) A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.	Comply	
(b) If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.	Comply	Pass
(c) Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.	Comply	
(d) When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10N applied for 10 s.	Comply	



liness otherwise agreed in writing. This program is issued by the Company with act to its General Conditions of General problet overlead, available on request or accessable at high/lives against an interpretable conditions for Electronic Documents at http://www.igs.com/enite-prospections.com/enite-property-and-Conditions/feet-act-Documents.act-Docume

576年 ((Aut 2007年) 1764 (1764 (1764 (1765 200233) 中国・上海・特征区立山東部9号7号線 解釈 200233 1) (35-21) 61402668 1) (35-21) 61402668

8 1 (85-21) 64956763 8 1 (85-21) 64956763 www.sgsgroup.com.on # ege.china@age.com



SL52035273350201TX

Date:July 29,2020

Page 7 of 10

Clause 7.16 Breathing Resistance

(EN 149:2001+A1:2009, Clause 8.9)

	Tes	Results	Comment			
The penetration requirements of						
Classification	Maximu	um permitted resista	ance (mbar)		Data'll actions	
	Inf	nalation	Exhalation		Detail refer to	Pass
	30 l/min	95 l/min	160 l/min		Appendix 5	
FFP1	0.6	2.1	3.0			
FFP2	0.7	2.4	3.0			
FFP3	1.0	3.0				

Appendix 5: Summarization of Test Data

Breathing resistance (mbar)

																	-
	Flow rate(I/min)				1					2					3		
	Flow rate(I/	min)	Α	В	С	D	Е	Α	В	С	D	Е	Α	В	C	D	Е
As received	Inhalation	30	0.5	0.6	0.5	0.6	0.5	0.6	0.5	0.6	0.5	0.5	0.6	0.6	0.5	0.6	0.6
	IIIIaialioii	95	2.1	2.1	2.2	2.1	2.2	2.1	2.1	2.2	2.1	2.1	2.2	2.1	2.1	2.2	2.2
	Exhalation	160	2.3	2.4	2.3	2.3	2.3	2.4	2.4	2.3	2.3	2.3	2.3	2.4	2.3	2.4	2.3
	5 1	/ ! - \		•	4	•	•		•	5		•			6		
Simulated	Flow rate(I	min)	Α	В	С	D	Е	Α	В	С	D	Е	Α	В	С	D	Ε
wearing	Inhalation	30	0.5	0.6	0.5	0.6	0.6	0.5	0.6	0.5	0.5	0.6	0.6	0.5	0.6	0.5	0.6
treatment	IIIIaialioii	95	2.2	2.2	2.2	2.1	2.1	2.2	2.2	2.1	2.1	2.2	2.2	2.1	2.2	2.1	2.2
	Exhalation	160	2.3	2.4	2.4	2.3	2.3	2.4	2.4	2.3	2.3	2.3	2.4	2.3	2.3	2.4	2.4
				7 8					9								
	Flow rate(I	min)	Α	В	С	D	Е	Α	В	С	D	Е	Α	В	С	D	Е
Temperature	Inhalation	30	0.5	0.6	0.5	0.6	0.6	0.5	0.5	0.6	0.6	0.5	0.6	0.5	0.6	0.6	0.5
conditioned	IIIIaialioii	95	2.1	2.2	2.1	2.1	2.2	2.1	2.2	2.1	2.2	2.2	2.1	2.1	2.1	2.2	2.2
	Exhalation	160	2.2	2.3	2.3	2.2	2.3	2.3	2.3	2.2	2.3	2.2	2.3	2.3	2.2	2.3	2.3
	5 1	/ ! - \			10					11					12		
	Flow rate(I	min)	Α	В	С	D	Е	Α	В	С	D	E	Α	В	С	D	Ε
Flow	Inhalation	30	0.4	0.5	0.6	0.4	0.5	0.5	0.6	0.4	0.5	0.5	0.6	0.4	0.4	0.5	0.5
conditioned	iiiiaialiUII	95	2.1	2.2	2.1	2.2	2.2	2.1	2.1	2.2	2.1	2.1	2.2	2.2	2.2	2.1	2.2
	Exhalation	160	2.2	2.3	2.2	2.2	2.3	2.3	2.3	2.2	2.3	2.3	2.3	2.2	2.2	2.2	2.3

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side



liness otherwise agreed it writing this proximent is issued by the Company with sold in its General Conditions of General probled overheal, shalled and request or accessible at high/www.ags.comen/lands-and-Conditions.ags.and, for also control of the company of the formation of

576年 njh (89)74 n fie 134 i Dobidžie g ei (1862-200233 中国・上海・特江区立山 東部19号 7号数 - 新編 - 200233 1)35-21) 61400668 1)35-21) 61400668

1 (85-21) 84958783 1 (85-21) 84958783 www.sgsgroup.com.cn # ege.china@ags.com



SL52035273350201TX

Date:July 29,2020

Page 8 of 10

Clause 7.17 Clogging

(EN 149:2001+A1:2009, Clause 8.9 & 8.10)

	Test Requirement	Results	Comment
Valved particle filt After clogging the FFP1: 4 mbar, FF The exhalation re flow. Valveless particle After clogging the	eathing resistance tering half masks: inhalation resistances shall not P2: 5 mbar, FFP3: 7 mbar at 95 esistance shall not exceed 3 mb filtering half masks: inhalation and exhalation resisters: P2: 4 mbar, FFP3: 5 mbar at 95	Optional for single shift device only	N.A.
All types (valved	netration of filter material and valveless) of particle filter grequirement shall also meet th Maximum penetration Sodium chloride test 95 l/min % max. 20 6	Optional for single shift device only	N.A.

Clause 7.18 Demountable Parts

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
All demountable parts (if fitted) shall be readily connected and secured, where possible by hand	Comply	Pass

Test	Uncertainty
Total inward leakage	3.4%
Penetration of filter material	4.8%
Carbon dioxide content of the inhalation air	3.9%
Breathing resistance (30L/min)	5.9%
Breathing resistance (95L/min)	4.9%
Breathing resistance (160L/min)	4.3%



linear otherwise agreed it writing this potential is issued by the Company with act this Genetic Conditions of Service printed createst, available on requestion accessible as high-flower agreement forms and Conditions are and Conditions for Electronic Documents and high-flowers are non-information of Electronic Documents are high-flowers are non-information of the control of the Company of the Condition of the Condition of the Company of

 1)35-21) 61400666 1)35-21) 61400666

1 (85–21) 84958783 1 (85–21) 84958783 www.sgsgroup.com.cn # ege.china@age.com




SL52035273350201TX

Date:July 29,2020

Page 9 of 10

Sample Photo

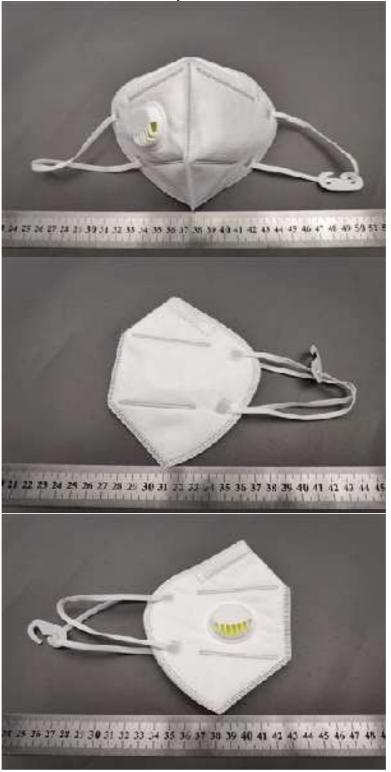



linear otherwise agreed in writing this proposes is issued by the Company with sold in its General Conditions of General problem overheal, available on request or accessible at http://www.sgs.com/an/lemo-and-Conditions.asp. and, for also-conditions of Electronic Documents at http://www.sgs.com/an/lemo-and-Conditions/repress 200cmments.asp. auditorior is drawn to the individuo of libitity. Indomition of a juricidion is based defined theorie, way holder of this document is advanted to the individuo of libitity. Indomition of a juricidion is based defined theorie, way holder of this document is advanted by the control of the company and respectability is the Chert and this document only and within the linits of items an abundance, it any. The Company and are respectabled in the Chert and this document control cannot be respectable to the individual prior or their approval of the Company. Any unauthor and altered in the property and a property and unauthor and altered in the control of the control of

5³5 春 東海 (89) Web office 19 a 470 本 470 年 東 e 17 fice 2002 33 中国・上海・特江区立山 海890号 7号線 - 約48 - 2002 33 1) (35-21) 61400666 1) (35-21) 61400666

1 (85–21) 64958763 1 (85–21) 64958763 www.sqsqroup.com.on # ege.china@aga.com



SL52035273350201TX

Date:July 29,2020

Page 10 of 10



End of Report



linear otherwise agreed it writing this potential is taked by the Company with ad in its General Conditions of Service printed coverteet, available on requestion accessible as high/however as consent terms and Conditions ago, and, for electronic in midded market in Terms and Conditions and Conditions of Electronic Decements at high weeks to conditions and conditions for Electronic Decements as high weeks to conditions and conditions for Electronic Decements as high weeks to conditions and conditions for the Electronic Interest of Electronic Interest and the Interest of Electronic Interest and Electronic Interest Inte

1) (35-21) 61400666 1) (35-21) 61400666

1 (85-21) 64958763 1 (85-21) 64958763 www.sqsqroup.com.on # ege.china@age.com

EU Declaration of Conformity

Manufacturer: Hunan EEXI Technology & Service Co., Ltd. Address: No.6, North of Pingtou road, Liuyang Hi-Tech industrial development zone, Hunan, China

declares that the new PPE described hereafter

Product name	Particle filtering half mask	
Model	YX152, YX153	П
Standard	EN 149: 2001+A1: 2009	
Classification	FFP2 NR	

is in conformity with the Regulation (EU) 2016/425 and with harmonized standard EN 149:2001 + A1:2009

performed the EU type-examination (Module B) and issued the EU type-examination certificate FI20/966321

performed the EU type-examination (Module D) and issued the EU type-examination certificate

CN21/42014

Notified Body information

Module B	Module D
SGS Fimko Oy	SGS Fimko Oy
Takomotie 8, FI-00380	Takomotie 8, FI-00380
Helsinki, Finland	Helsinki, Finland
Notified Body No. 0598	Notified Body No. 0598

Signed for on behalf of Company

Name: Robin Liu

Position: CEO & Owner

Date: 2021-01-18

Signature:

SES

Certificate CN21/42014

The management system of

Hunan EEXI Technology & Service Co., Ltd.

No.6, North of Pingtou Road, Liuyang Hi-Tech Industrial Development Zone, Hunan, 410300, P.R. China

has been assessed and cartified as meating the requirements of

Regulation (EU) 2016/425

Module I

For the following activities

Manufacture of the FFP2 Protective Respirators
(Note: all products marked CE0598 must have a valid EU Type
Examination Certificates issued under Module B or a valid EC typeexamination certificate issued under Article 10 of the PPE Directive
89/686/EEC.)

This certificate is valid from 5 January 2021 until 4 January 2024 and remains valid subject to satisfactory surveillance audits. Re certification audit due before 29 November 2023 Issue 1. Certified since 5 January 2021

Authorised by

FINAS
Finnish Accreditation Service
S003 (EN ISO/IEC 17065)



SGS FIMKO OY, Notified Body 0598

Takomolie 8, FI-00380 Helsinki, Finland t+358 9 696 361 | f+358 9 892 5474 | www.egs.com

Page 1 of 1



The document is request by the Company outgot to be General Conditions of Gall Backer General Good Gall in the Gall Backer General Section in the Company of the Brusham of Backer, properties and conditions and subscribers and the Brusham of Backer of the Gall of the Gal

Hunan EEXI Technology & Service Co.,Ltd

No.6, North of Pingtou Road, Liuyang Hi-Tech Industrial Development Zone, Hunan, China

It is certified that the manufacturer's technical file and the PPE product detailed on page 2 have been assessed and found to be in accordance with

Regulation (EU) 2016/425

Module B, EU type-examination

This certificate is valid from 10 February 2021 until 10 February 2026 3. Certified since 6 August 2020

Authorised by

SGS FIMKO OY, Notified Body 0598

Takomotie 8, FI-00380, Helsinki, Finland t+358 9 696 361 f+358 9 692 5474 www.sgs.com

Page 1 of 2



Hunan EEXI Technology & Service Co.,Ltd

Regulation (EU) 2016/425

Module B, EU type-examination

Issue 3

PPE Product

- Eexilnherent (logo) YX152 particle filtering half mask, consisting of a five layer (polypropylene) disposable face mask, with nose clip, and polyester ear loops with polypropylene hook, available in seven colourways:
 Black, Blue, Green, Grey, Pink, Red or White;
- b) Eexilnherent (logo) YX153 particle filtering half mask, consisting of a five layer (polypropylene) disposable face mask, with polypropylene valve, nose clip, and polyester ear loops with polypropylene hook, available in seven colourways: Black, Blue, Green, Grey, Pink, Red or White.

It is certified that the manufacturer's technical file and the above mentioned PPE have been assessed and found to meet the applicable Essential Health and Safety Requirements in Annex II of Regulation (EU) 2016/425 Personal Protective Equipment

The following have been applied:

EN 149:2001+A1:2009 (Respiratory protective devices - filtering half masks to protect against particles) device classification: FFP2 NR.

This certificate is issued on the strict condition that appropriate checks on manufactured PPE, as detailed in Article 19 (c) of the Regulation are implemented and maintained while the model is in production

Certification is based on technical file reference: YX152/YX153, Rev 2, dated: 2021-02-02.

SGS Reference Number UK/CRS 241545.

This certificate remains the property of SGS Fimko Oy to whom it must be returned on request.

